

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

FILED IN RECORD
SKAMANIA CO. WASH.
BY *Tennessee Surveying*

JUN 14 12 28 PM '94

P. Olsson
AUDITOR
GARY H. OLSON

CORNER INDEXING INFORMATION:

TWP 3 N. RGE 7 E. W.M. G-19 CORNER CODE G-19
(Willamette Meridian) (See Instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

118503

BOOK 140 PAGE 863

COUNTY: Skamania


AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.030)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: Tennessee Engineering Corporation

ADDRESS: 409 Lincoln Street
The Dalles, Oregon 97058

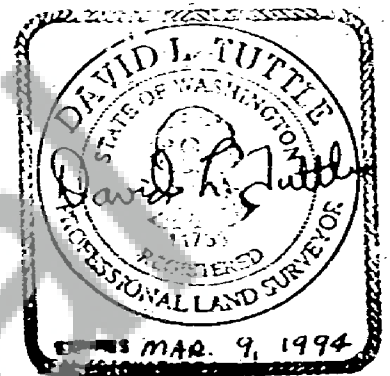

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

- (1) Not set by G.L.O.
No recorded evidence on record at County office
- (2) No evidence found
- (3) Set 2 1/2" brass cap attached to 5/8" x 30" galvanized iron pipe
Set four reference trees with tags and notches as follows:
 - A 12" white fir with spike set in root crown bears N.48° E., 24.27' dist.
 - A 12" white fir with spike set in root crown bears S.10° E., 12.20' dist.
 - A 18" Douglas fir with spike set in root crown bears S. 42° W.,
27.62' dist.
 - A 12" Douglas fir with spike set in root crown bears N. 57° W.,
19.66' dist.Set steel fence 3' North of corner


NOTE: Survey and BT ties basis of bearing is Washington State Coordinate System, South Zone Grid.

Registered _____
Indexed _____
Inspected _____
Filed _____
Mailed _____

DATE OF FORM: 2/92

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

- (1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):
- (a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.
- (2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):
- (a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.
 - (b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE 1/4 of the SE 1/4 of section 18 is designated MM-4-5.

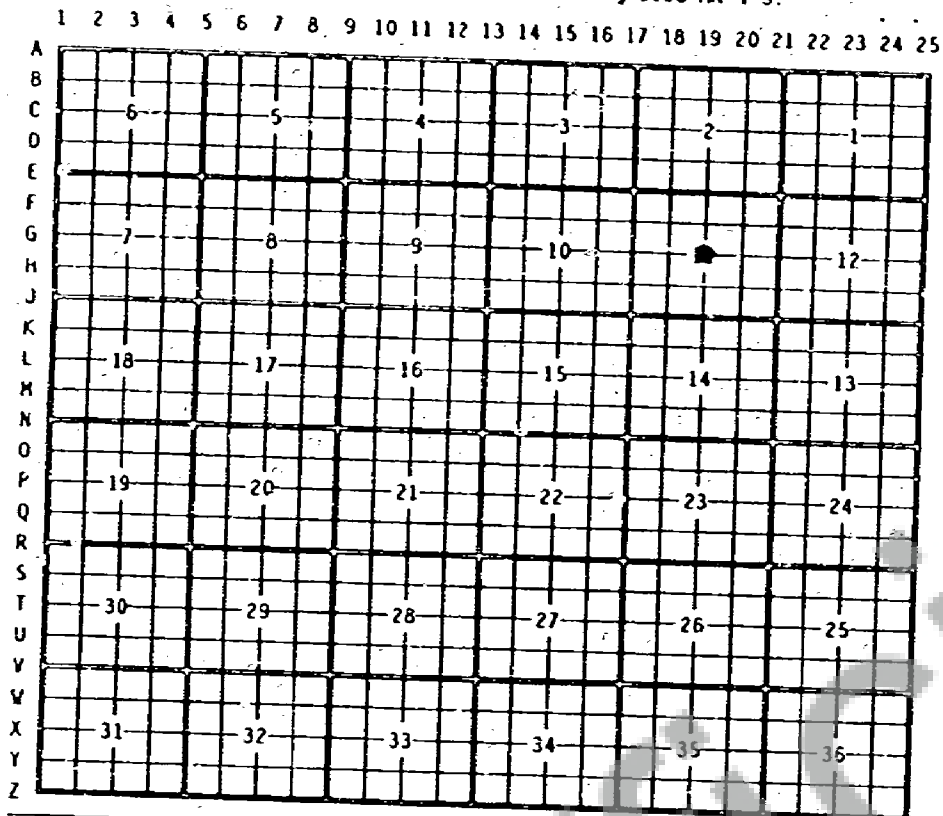

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

UNOFFICIAL COPY