

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

FILED IN BOOK
SKAMANIA COUNTY WASH

BY Terra Surveying

JAN 19 3 27 PM '94

P. Johnson
AUDITOR

GARY M. OLSON

CORNER INDEXING INFORMATION:

TWP 2N RGE 6E CORNER CODE E-13
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

118545

BOOK 140 PAGE 937

SECTIONS $\frac{4}{9} \frac{3}{10}$

COUNTY: SKAMANIA


AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: TERRA SURVEYING

ADDRESS: P.O. BOX 617
HOOD RIVER, OR 97031

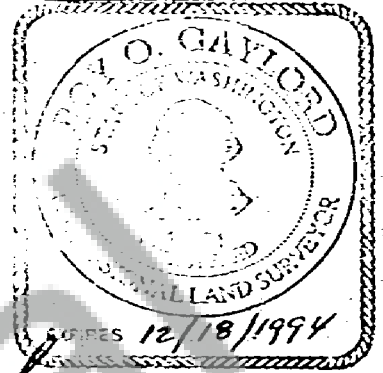

12/30/1993
Gary M. Olson

SEAL/SIGNATURE/DATE

WASHINGTON PLANE COORDINATES: N:

E:

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

Corner was originally set by Charles Sims in 1883.

Found DNE Brass cap set on a concrete post 8" above the ground

Found green metal fence post next to corner

Found State of Washington TAG for LOCATION POSTER, T2N R6E, on 18" Day Fir. Located by RS 12-19-1966 55W 14' TO CORNER set by CHAINING.

Found STATE of Washington TAG for LOCATION POSTER, Located by RS, 21" SRAy. 12-19-1966 N42 1/2 W 10' TO CORNER T2N R6E set by CHAINING

Checked
Correct
Filed
Mailed

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated 5C-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C		6			5				4					3					2						1
D																									
E																									
F																									
G		7			8				9					10					11						12
H																									
J																									
K																									
L		18			17				16					15					14						13
M																									
N																									
O																									
P		19			20				21					22					23						24
Q																									
R																									
S																									
T		30			29				28					27					26						25
U																									
Y																									
W																									
X		31			32				33					34					35						36
Y																									
Z																									

BOOK 140 PAGE 938

RCW 58.09.050 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

USED DNR SURVEY OF BOOK 3, PAGE 2
FOR BEARING BASIS.

CORNER WAS IN GOOD SHAPE.