

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

FILED FOR RECORD
SKAMANIA CO. WASH
BY Bob Glaeser

FEB 1 4 18 PM '94
P. Larry
AUDITOR
GARY H. OLSON

Corner Indexing Information:

TWP 1 N RGE 5 E Corner Code E-7
(Willamette Meridian)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.) South quarter corner of Section 5, Township 1 North, Range 5 East, Willamette Meridian.

118646

BOOK 141 PAGE 230

Skamania County Washington:

Land Surveyor Information: (or Public Officer as per RCW 58.09.090)

AUDITOR'S USE

This corner record correctly represents work performed by me or under by direction in conformance with the Survey Recording Act.

Company or agency:
Minister & Glaeser Surveying, Inc.
2208 E. Evergreen Blvd.
Vancouver, WA. 98661
Phone: (206) 694-3313
Fax: (206) 694-8410



Signature [Signature] Date: 1/21/94 Seal: _____
Washington Plane Coordinates: N: _____ E: _____
Order: _____ Zone: _____ Datum (Date of adjustment): _____

Corner Information: Use the space below to provide the following information regarding the corner.

(1) Pertinent Corner History: The original survey was conducted by Deputy Surveyors, Lewis Van Vleet and John Newsom, under contract No. 47, dated the 23rd day of April, 1859. The survey was conducted between April 26th and April 29, 1859. Set a quarter section post common to Sections 5 and 8. R.P.'s were as follows:
36" diameter Fir, South 49° West, 44 Links.
6" diameter Alder, North 18° West, 100 Links.

In August of 1973, W.F. Hagedorn conducted a survey (Book 1, page 6, of Skamania County records), and found Iron Rod. Held as the South quarter corner of said Section 5.

(2) Evidence Found at the Corner: No original evidence found. The position of this corner was calculated based on survey found in records of Skamania County, Survey Book 1, page 6. Iron Rod was accepted as the corner based on reputation.

Reviewed _____
Indexed, Ltr _____
Indexed _____
Filed _____
Mailed _____

(3) Corner Perpetuation Information:
Refer to the following records of surveys:


BOOK 141 PAGE 231

Surveys

Subdivisions

Short Plats

Book 1, page 6

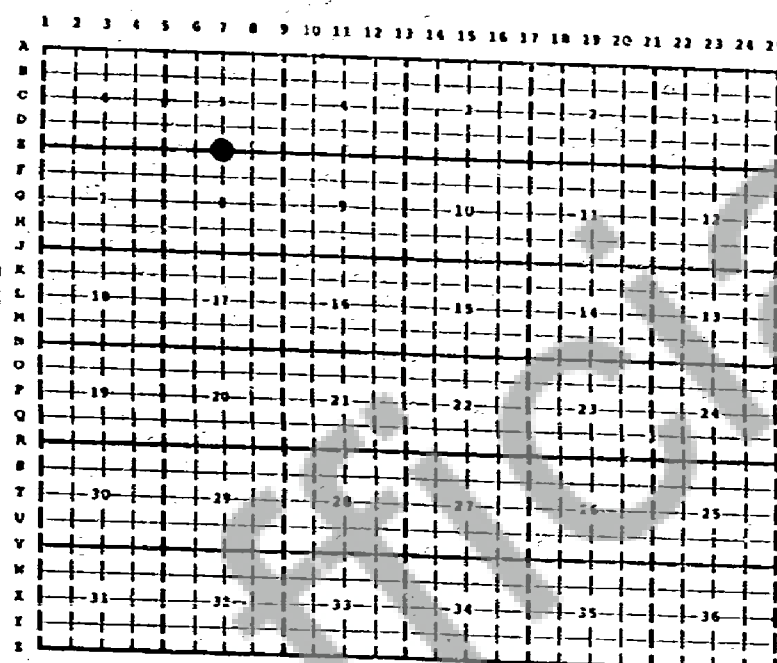

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENTS: