

# LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

FILED FOR RECORD  
SKAMANIA CO. WASH  
BY Bob Glaeser

FEB 14 37 PM '94  
G. Laury  
AUDITOR  
GARY H. OLSON

## Corner Indexing Information:

TWP 1 N RGE 5 E Corner Code C-5  
(Willamette Meridian)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.) West quarter corner of Section 5, Township 1 North, Range 5 East, Willamette Meridian.

118651

BOOK 141 PAGE 240


Skamania County Washington:

Land Surveyor Information: (or Public Officer as per RCW 58.09.090)

AUDITOR'S USE

This corner record correctly represents work performed by me or under by direction in conformance with the Survey Recording Act.

Company or agency:  
Minister & Glaeser Surveying, Inc.  
2208 E. Evergreen Blvd.  
Vancouver, WA. 98661  
Phone: (206) 694-3313  
Fax: (206) 694-8410

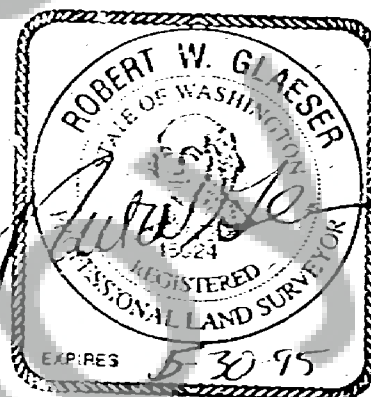

Signature [Signature] Date: 1/21/94 Seal:

Washington Plane Coordinates: N: \_\_\_\_\_ E: \_\_\_\_\_  
Order: \_\_\_\_\_ Zone: \_\_\_\_\_ Datum (Date of adjustment): \_\_\_\_\_

Corner Information: Use the space below to provide the following information regarding the corner.

(1) Pertinent Corner History: The original survey was conducted by Deputy Surveyors, Lewis Van Vleet and John Newsom, under Contract No. 47, dated the 23rd day of April 1859. The survey was conducted between April 26th and April 29, 1859. Set a quarter section post common to Sections 5 and 6. R.P.'s were as follows:  
10" diameter Alder, North 17° East, 25 Links.  
6" diameter Alder, North 43° West, 20 Links.

In August of 1973, W.F. Hagedorn conducted two surveys (Book 1, page 6 and page 7 of Skamania County records), found and held Iron Pipe set by B. Smith as the West quarter corner of said Section 5.

In January of 1992, W.F. Hagedorn conducted a survey (Book 3, page 73, of Skamania County records), made a search for 1859 G.L.O. B.T.s not found. Set 1" Iron Pipe with Brass Cap at single proportionate position. Found 3/4" Iron Pipe, South 77°06'58" West 23.99 from set Iron Pipe.

Registered [Signature]  
Indexed [Signature]  
Filed [Signature]  
Date 1/21/94

BOOK 141 PAGE 241

(2) Evidence Found at the Corner: No original evidence found. Found 2 1/2" diameter Brass Cap (LS 9579), set in Survey (Book 3, page 73, of Skamania County Records). The 2 1/2" Brass Cap was accepted as the corner based on reputation and use.

(3) Corner Perpetuation Information:


Refer to the following records of surveys:

Surveys

Book 3, page 73  
Book 1, page 6  
Book 1, page 7

Short Plats

Book 3, page 207

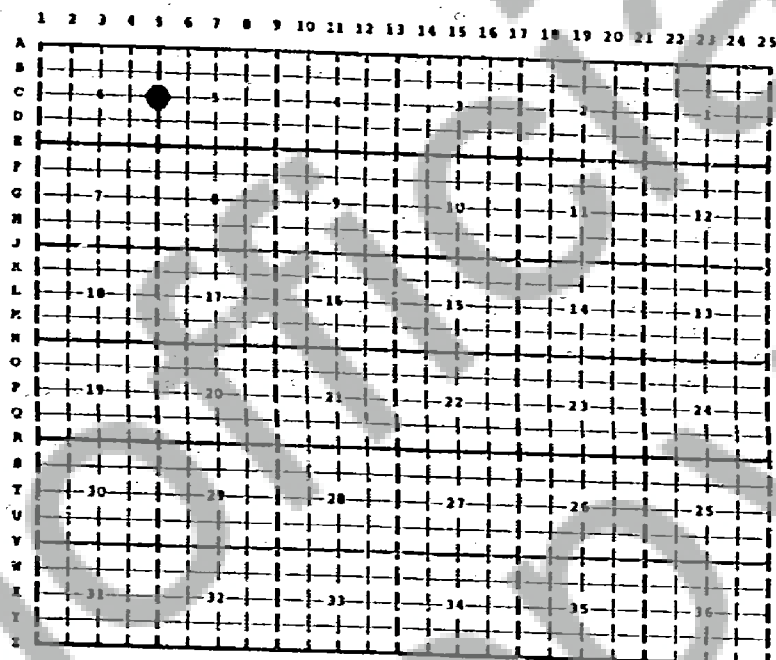

RCV 55-07-060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENTS

IN SURVEY (BOOK 3, Page 73, OF SKAMANIA COUNTY RECORDS), SAID 1" I.P. WITH BRASS CAP (LS 9579) WAS REFERENCED AS FOLLOWS:

12" ALDER, N. 10° E., 15.74 (BARK SCRIBED "1/4 S5 BT")  
8" MAPLE, S. 32° E., 11.00 (SCRIBED "1/4 S5 BT")  
8" ALDER, S. 65° W., 20.32 (BARK SCRIBED "1/4 S6 BT")

FOUND 3/4" I.P. S. 77° 06' 58" W. 23.99 FROM SET I.P.