

127152

BOOK 162 PAGE 23

FILED IN RECORD
SKAMIA WASH
BY Jerry Olson

JAN 21 1 06 PM '97

GARY M. OLSON
AUDITOR

LAND CORNER RECORD

GRANTOR: JERRY C. OLSON This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: Olson Engineering Inc.

ADDRESS: 1111 Broadway
Vancouver, Wa 98660**OLSON**
ENGINEERING INC.1111 Broadway, Vancouver WA 98660
PH 206-730-1200 FAX 206-730-1200

GRANTEE: PUBLIC

LEGAL: TWP: 1N RGE: 5E CORNER CODE: C-13

ADDITIONAL IDENTIFIER: (BLM designation, street or plat names, block, lot, etc.)

EAST 1/4 CORNER SECTION 4


COUNTY: Skamania

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and, if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

The original corner post was established on June 5, 1895 by United States Deputy Surveyor, Lewis Van Vleet. Bearing trees were a 30" fir South 63° East, 227 links and a 20" fir South 62° West, 491 links, of which no evidence remains. During a previous survey (1/10) a 3/4" iron pipe was set at a 4-way fence intersection. This fence intersection also agrees with the GLO call from creek to the South and fits record GLO distance from the Northwest corner of section.



This form is in compliance with the intent of RCW 65.04.045 and prescribed by the Public Land Survey Office, Department of Natural Resources - 1/97.

Engineered ☒
Indexed ☒
Indexed ☒
Filed ☐
Valid ☐

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:


(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, OLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "E" and "C" is designated EC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

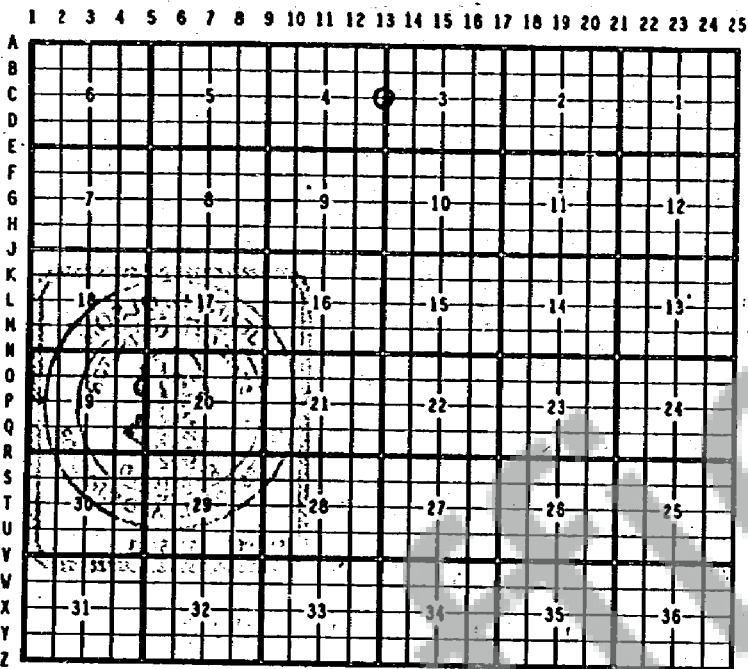

RCV 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: