

RECORD OF SURVEY
IN THE
SW 1/4 SW 1/4
SEC. 5, T3N, R8E, W.M.,
AND IN
NW 1/4 NW 1/4
SEC. 8, T3N, R8E, W.M.,
SKAMANIA COUNTY, WA

CALCULATED POSITION BASED UPON
DEPT. OF NATURAL RES. SURVEY
D.N.R. S. FINAL MAP NO. 462
DATED JULY 1983. SEE L.C.R.
REC. IN BK. 3/8, PG. 62

CALCULATED POSITION BASED UPON
DEPT. OF NATURAL RES. SURVEY
D.N.R. S. FINAL MAP NO. 462
DATED JULY 1983

FOUND D.N.R. BRASS CAP (OBVIOUSLY
DISTURBED), LEANS SOUTHEAST 0.8' +/-
ALONG WITH THREE R.P.'S.
18" FIR N 32° W 12.24'
26" FIR STUMP N 76° E 12.35'
16" FIR STUMP S 10° E 33.23'
WE HED THE THREE R.P.'S.
(AS SHOWN IN D.N.R. S. SURVEY)
AND RECORDED THE POSITION OF
THE BRASS CAP. THE POSITION OF
THE BRASS CAP FALLS
18.15' TO 18.23' FROM THE
CALCULATED POSITION


FOUND D.N.R. BRASS CAP ALONG WITH
THREE R.P.'S. (AS SHOWN ON D.N.R. S.
SURVEY) N 50°43'55" W 0.32' FROM THE
CALCULATED POSITION

NARRATIVE
THE PURPOSE OF THIS SURVEY WAS TO
FLAT/BLADE THE EAST AND WEST BOUNDARY
LINES OF THE SURVEYED PROPERTY FOR
LOOKING PURPOSES AND MONUMENTS WERE
SET DURING THIS SURVEY.

LEGEND

- FOUND MONUMENT AS DESCRIBED DURING
THIS SURVEY UNLESS OTHERWISE NOTED.
- ◎ SET 3/4" X 24" IRON PIPE WITH BRASS
CAP DURING PREVIOUS SURVEY (1/280)
REC. MARCH 1980.
- ◎ SET 1/2" X 24" IRON ROD WITH YELLOW
PLASTIC CAP (OLSON 902) DURING PREVIOUS
SURVEY (1/135) REC. DEC. 1977

BASIS OF BEARINGS
BEARINGS AND DISTANCES ARE BASED ON WASHINGTON
STATE PLANE COAST AND GEODETIC SURVEY (ZONE 1). THE
COMPUTED GRID SCALE FACTOR IS 0.999960888 AT
THE S.W. CORNER OF SECTION 5.

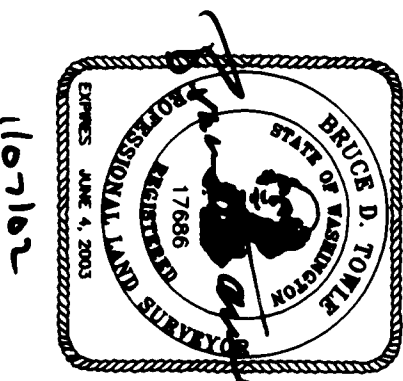

SURVEYOR'S CERTIFICATE

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN
CONFORMANCE WITH THE REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE REQUEST OF

in NOVEMBER 2001

Bruce D. Towle PLS NO. 17666

AUDITOR'S CERTIFICATE

FILED FOR RECORD THIS 11th DAY OF January 2002
AT 2:40 P.M. IN BOOK 3 OF SURVEYS AT PAGE 418

AT THE REQUEST OF

Jerry L. Towle
North County Auditor

FILE: /map/7100/7101.srs
PLOT: /map/7100/7101.srs.doc
COPYRIGHT 2002, OLSON ENGINEERING, INC.

OLSON ENGINEERING INC. LAND SURVEYORS
1111 BROADWAY
VANCOUVER, WA 98660
360/695-1385

SCALE 1" = 200'
JOB NO. 7101
DATE NOV. 2001

DRAWN BY VFB
CALC. BY VFB
SHEET 1 OF 1

FOUND SKAMANIA COUNTY BRASS CAP DURING
PREVIOUS SURVEY. SEE CORNER HISTORY BELOW.
THE ORIGINAL CORNER WAS ESTABLISHED
IN 1896 UNDER CONTRACT NO. 414 AS A POST
SET BY ROBERT WESTER WITH ACCESSORIES
OF A 24" FIR 54°E 37 LINKS DISTANCE AND
A 30" FIR 57 1/2°W 118 LINKS DISTANCE.
IN 1975 OLSON ENGINEERING, INC. FOUND A
SKAMANIA COUNTY BRASS CAP AT THE CORNER
POSITION (BK. 1, PG. 54).

SURVEY REFERENCES

SURVEY BY DEPARTMENT OF NATURAL RESOURCES
D.N.R. S. FINAL MAP NO. 462, DATED JULY 1983
SURVEY BY OLSON ENGINEERING, INC. FOR
GARY HEENWOLD (1/280) REC. MARCH 1980
SURVEY BY OLSON ENGINEERING, INC. FOR
SKAMANIA COUNTY (1/54) REC. JULY 1975
SURVEY BY OLSON ENGINEERING, INC. FOR
LEWIS WEECE (1/135) REC. DEC. 1977

DEED REFERENCE

GRANTOR: LYNN AND MARGARET KELLEY
GRANTEE: ROBERT AND MARSHA SCHONE
BOOK 74, PAGE 351
DATE: MARCH 6, 1978

PROCEDURE

FIELD TRAVERSES WERE PERFORMED WITH A LEICA
TC1610 (1") AND ADJUSTED BY COMPASS RULE

NOTE

OLSON ENGINE, INC. SUBDIVIDED SECTION 8 DURING
THE SURVEY FOR GARY HEENWOLD IN 1980. THE D.N.R.
SUBDIVISION SECTION 5 IN 1983. IN CONFORMANCE, OUR
DISTANCE ALONG THE SOUTH LINE OF THE S.W. QUARTER
OF SEC. 5 WAS 0.13' LONGER THAN D.N.R. S. FOR THE
PURPOSE OF THIS SURVEY, WE HEED THE ANGLES AND
DISTANCES OF THE D.N.R. SURVEY ALONG THE NORTH AND
WEST LINES OF SAID SEC. 5 AND OUR DISTANCE ALONG THE
SOUTH LINE OF SAID SEC. 5 AND OUR DISTANCE ALONG THE
D.N.R. S. BEARING ALONG THE EAST LINE OF THE S.W.
QUARTER OF SECTION 5 BASED UPON THE S.W. QUARTER OF
SECTION 5 AND HAVE SHOWN THIS ACCORDINGLY.

