


LAND CORNER RECORD

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction, in conformance with the Survey Recording Act.

COMPANY OR AGENCY: USDA Forest Service
Gifford Pinchot National Forest
10600 NE 51st Circle
ADDRESS: Vancouver WA 98682

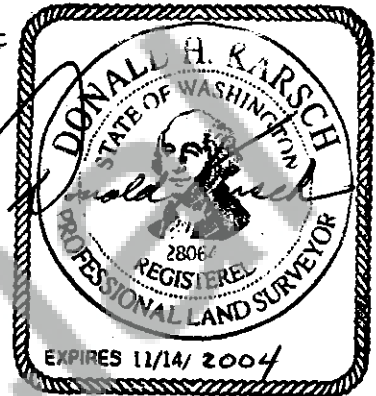

Don Karsch 9/01/2004
Forest Land Surveyor Date

GRANTEE: PUBLIC **SEAL/SIGNATURE/DATE**
LEGAL: NE 1/16 S23 TWP: 4 NORTH RGE: 7 EAST CORNER CODE: 020

ADDITIONAL IDENTIFIER: BLM designation, street, or plat names, block, lot, etc.

COUNTY: SKAMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM: (DATE OF ADJUSTMENT):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

Corner History:

This corner was originally established by the Bureau of Land Management, in May of 1982. They set, in a mound of stones, a 2 1/2" by 30" aluminum pipe with a 2 1/2" aluminum cap. They also tagged, painted, and scribed two bearing trees:

- A 7" Douglas Fir - S60°E, 10.5 links, scribed "NE 1/16 S23 BT."
- A 7" Douglas Fir - N63°W, 4.5 links, scribed "NE 1/16 S23 BT."

On July 21, 2004 I found the corner monument in good condition in a mound of stones. Corner sits at intersection of cut line on west facing slope.

Found BT's:

- A 7" now 8" Douglas fir live with overgrown face blaze bears N63°W, 3.1 ft. with attention sign and BT tag visible.
- A 7" now 8" dead fir snag bears S60°E, 7.3 ft. BT tag and attention sign visible.

New BT's established:

- A 14" Douglas Fir bearing S87°E, 46.80 ft. scribed "NE 1/16 S23 BT."
- Placed "BT" tag and "Land Survey Monument" signs on BT. Placed washer in tree face, and nail at side center.


Forest service property lines leading south and west from corner are brushed, blazed, painted, and posted w/USFS carsonite posts. Bearings are by compass w/18° East declination. Distances are to side center nail in each bearing tree.

Witnessed by: Georgene Wheatley, LSIT #74341

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

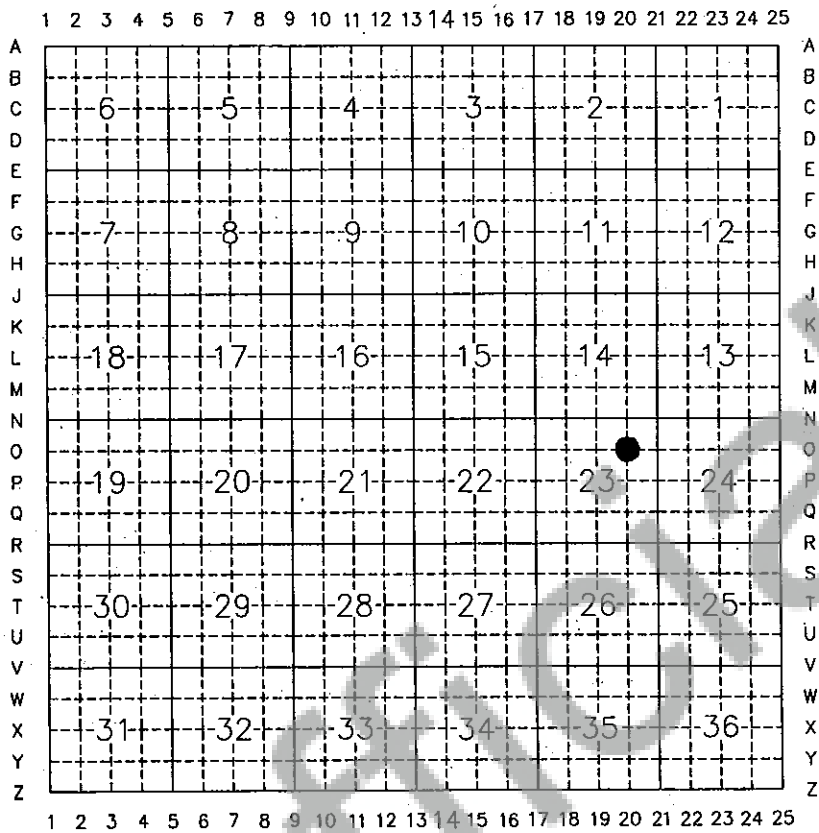

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

