


LAND CORNER RECORD

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction, in conformance with the Survey Recording Act.

COMPANY OR AGENCY: USDA Forest Service
Gifford Pinchot National Forest
10600 NE 51st Circle
ADDRESS: Vancouver WA 98682

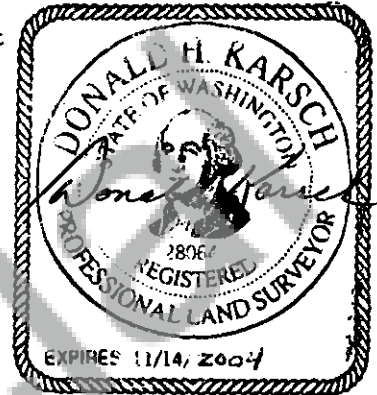

Don Karsch 9/01/2004
Forest Land Surveyor Date

GRANTEE: PUBLIC **SEAL/SIGNATURE/DATE**
LEGAL: W.C. W1/16 S23 **TWP:** 4 NORTH **RGE:** 7 EAST **CORNER CODE:** N18

ADDITIONAL IDENTIFIER: BLM designation, street, or plat names, block, lot, etc.

COUNTY: SKAMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER: **ZONE:** **DATUM:** (DATE OF ADJUSTMENT):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

Corner History:

This corner was originally established by the Bureau of Land Management, in May of 1982. They set a 2 1/2" by 30" aluminum pipe with a 2 1/2" aluminum cap. They also tagged, painted, and scribed two bearing trees:

- A 10" Alder - N79°E, 45.0 links, and bark scribed "X BT."
- A 20" Cottonwood - S50°W, 24.0 links, scribed "X BT."

On September 6, 2004 I searched for the Witness corner which is now submerged below Wind River. A steel post marking the corner is visible in the water.

Found BT's:

A 10" now 14" Alder with scribing, attention sign and BT tag visible. Found tree at record bearing and distance.

New RM established:

Set 5/8" iron rebar with 2" aluminum cap at a bearing of S55°30'E, 64.46 ft. from the witness corner. Placed a carsonite post with Land Survey Monument tag 1.0 ft. behind the RM facing the W.C. position.


Forest service property lines leading north and south from the W 1/16 corner position are brushed, blazed, painted, and posted w/USFS carsonite posts. Bearings are by compass w/18° East declination. Distances are to side center nail in bearing tree.

Witnessed by: Georgene Wheatley, LSIT #74341

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:
 For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.


For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

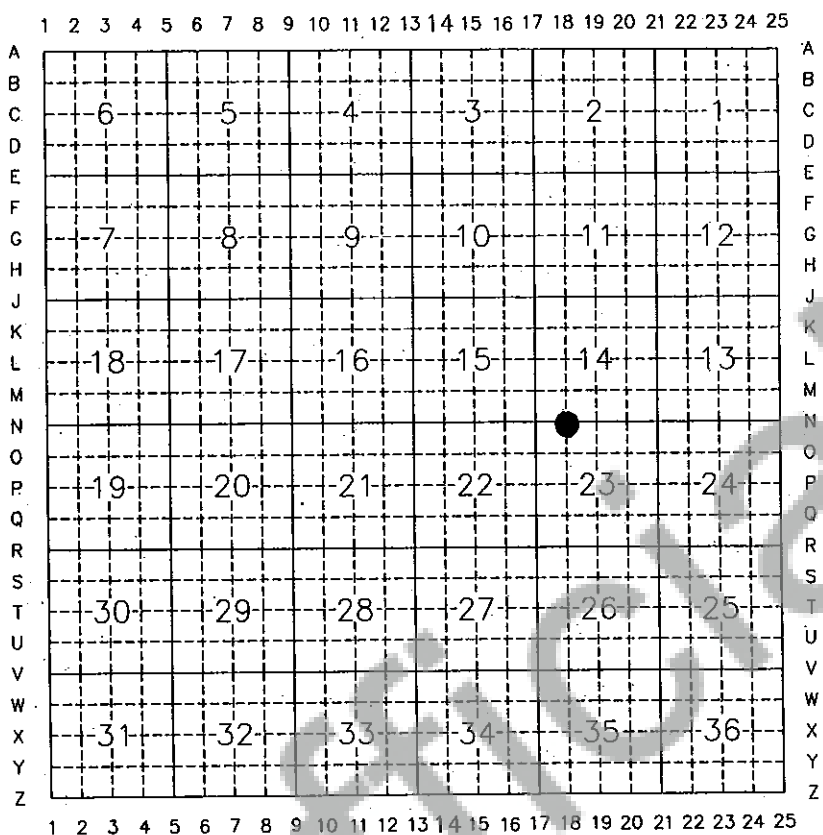

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

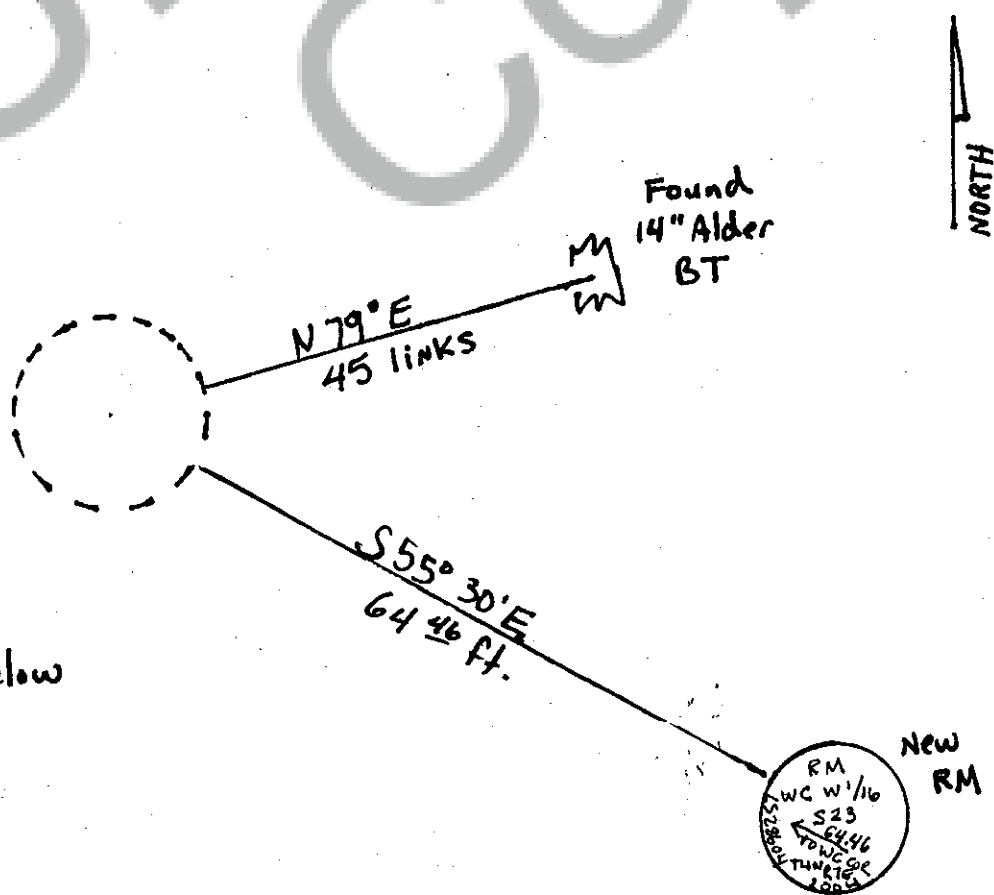

Witness Corner is
 now submerged below
 Wind River.