

**LAND CORNER RECORD**

**GRANTOR/SURVEYOR/PUBLIC OFFICER:** This corner record correctly represents work performed by me or under my direction, in conformance with the Survey Recording Act.

**COMPANY OR AGENCY:** USDA Forest Service  
Gifford Pinchot National Forest  
10600 NE 51<sup>st</sup> Circle  
**ADDRESS:** Vancouver WA 98682

Forest Land Surveyor: Donald H Karsch PLS #28064



**GRANTEE:** PUBLIC

**LEGAL:** C1/4 S 34 TWP:4 NORTH RGE:9 EAST CORNER CODE: X 15  
**ADDITIONAL IDENTIFIER:** (BLM designation, street, or plat names, block, lot, etc.)

**COUNTY:** SKAMANIA

**WASHINGTON PLANE COORDINATES:** N: E:

**ORDER:** **ZONE:** **DATUM:** (DATE OF ADJUSTMENT:

**CORNER INFORMATION:** Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

This corner was set by Roy Gaylord LS #18731, in 1983, he set an 2 1/2 ins. X 30 ins. alum. monument,

T4N R9E  
C1/4  
S 34  
PLS 18731  
1983

from which:

A Doug Fir, 13 ins. diam. now 16 ins. with healed face, bears N 43 E, 11.4 ft. dist.

A Doug Fir, 19 ins. diam. now 23 ins. with healed face, bears S 86 W, 11.8 ft. dist.

I scribe a new bearing tree: 10 ins. Doug Fir, bears S 6 W, 24.2 ft. dist. scribed: "C1/4S34BT" w/ brass washer LS#28064 attached to face. I painted all three bearing trees and all three have 54-3 and 54-9 signs attached.


Corner lies on flat ridge. To reach the corner travel west approximately 1.5 miles on FS road #5600 and lies approximately 1700 ft South along posted line.

This form is in compliance with the intent of RCW 65.04.045 and prescribed by the Public Land Land Survey Office, Department of Natural Resources - 1/97.

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:  
 For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

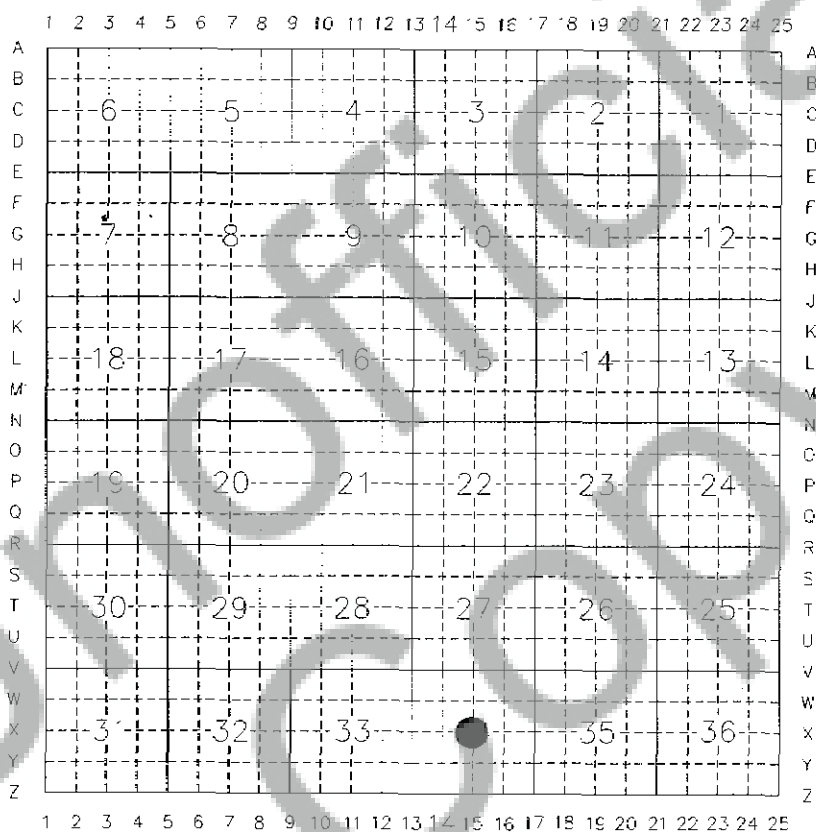

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: