

RECORD OF SURVEY


IN PORTIONS OF
SECTIONS 8, 9 & 16
T2N, R7E, W.M.,
SKAMANIA COUNTY,
WASHINGTON

SHEET 2 OF 2
MAY 23, 2011

M-13 SOUTH 1/16 CORNER SECTIONS 15 & 16:
-CORNER NOT ORIGINALLY ESTABLISHED BY THE GLO
-NO RECORD OF CORNER BEING SET OR RECOVERED
-CORNER IS AN 18" FIR TREE
-SET 5/8" X 36" IRON REBAR WITH ORANGE PLASTIC CAP ON LINE 5' NORTH OF TRUE CORNER

L-9 QUARTER CORNER SECTION 16 ONLY:
-CORNER WAS ORIGINALLY ESTABLISHED BY THE GLO IN 1859. GLO NOTES CALL THE CORNER COMMON TO BOTH SECTIONS 16 AND 17. PLAT AND LOTTING FROM 1901 GLO SURVEY SHOW THAT THERE ARE 2 QUARTER CORNERS.
-SURVEY REFERENCE 1 FOUND AN IRON ROD AND BIT AND REPLACED WITH 1/2" IRON REBAR WITH YPC STAMPED "HAGEDORN 9579"
-THIS SURVEY FOUND AND HELD SAID 1/2" IRON REBAR PER SURVEY REFERENCE NO. 1

- ① FOUND AND HELD 1/2" IRON REBAR WITH YPC STAMPED "HAGEDORN 9579" PER SURVEY REFERENCE NO. 1 FOR POINT OF INTERSECTION OF D/C LINE AND SECTION 16
- ② IRON ROD AND HELD 5/8" IRON REBAR WITH YPC STAMPED "HAGEDORN 9579" FOR WITNESS CORNER TO SECTION CORNER. SEE SURVEY REFERENCE NO. 6 & 7.
- ③ FOUND AND HELD 4" USASCE MON W/ "X" PER SURVEY REFERENCE NO. 4. HELD FOR WITNESS CORNER TO QUARTER CORNER.
- ④ FOUND AND HELD 4" USASCE MON PER SURVEY REFERENCE NO. 4. HELD FOR WITNESS CORNER TO SECTION CORNER.
- ⑤ FOUND AND HELD 5/8" IRON REBAR WITH YPC STAMPED "US 22330" PER SURVEY REFERENCE NO. 6.
- ⑥ FOUND AND HELD 5/8" IRON REBAR WITH YPC STAMPED "US 22330" PER SURVEY REFERENCE NO. 6.
- ⑦ FOUND AND HELD 3/4" IRON PIPE WITH YPC STAMPED "OLSON 9025" LINE PER SURVEY 1 REFERENCE NO. 1.

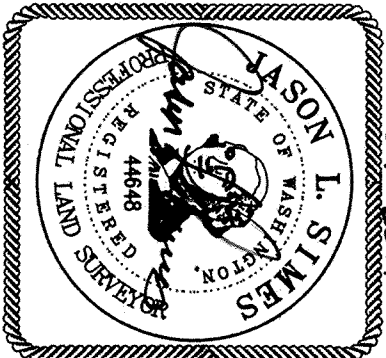

SURVEYOR'S CERTIFICATE
THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE REQUEST OF _____ IN _____ MAY _____, 2011.

Jason L. Simes
JASON L. SIMES, PROFESSIONAL LAND SURVEYOR, LS# 44648
SCALE: 1"=1000'
JOB NO. 2N279
DATE: 5-23-2011
CALC BY: JLS
DRAWN BY: JLS
CHECKED BY: JLS
SHEET 2 OF 2



LONGVIEW TIMBER
CORPORATION
10 INTERNATIONAL WAY
LONGVIEW, WA 98632

E-10 WEST SIXTEENTH CORNER SECTION 4 & 9:

-THIS CORNER WAS NOT ORIGINALLY ESTABLISHED BY THE GLO
-THERE IS NO RECORD OF THIS MONUMENT BEING SET
-FOUND DNR LOCATION TAG ON A TREE IN THE VICINITY OF THE CORNER WITH APPROXIMATE BEARING AND DISTANCE. NO MONUMENT FOUND
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCES:
8" FIR SCRIBED [W 1/16 S9 BT] N08° E 9.70'
22" FIR SCRIBED [W 1/16 S9 BT] S87° E 3.95'
1" POST SOUTH 3'

G-10 CENTER WEST SIXTEENTH CORNER SECTION 9:

-THIS CORNER WAS NOT ORIGINALLY ESTABLISHED BY THE GLO
-THERE IS NO RECORD OF THIS MONUMENT BEING SET
-SET TYPICAL MONUMENT IN A MOUND OF STONE PER LEGEND WITH THE FOLLOWING NEW REFERENCES:
17" FIR SCRIBED [W 1/16 S9 BT] S35W 8.25'
20" FIR SCRIBED [X BT] N42W 11.90'
1" POST SOUTH 2'

G-13 QUARTER CORNER SECTIONS 9 & 16:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A STONE WITH THE FOLLOWING REFERENCES:
36" RED FIR N85° E 68 LINKS (44.88')
30" RED FIR N66° W 182 LINKS (120.12')
-IN 1953 BLM CONDUCTING A DEPENDENT RESURVEY OF SECTION 4 FOUND THE ORIGINAL BEARING TREES AND SET AN IRON POST WITH THE FOLLOWING NEW REFERENCES:
28" FIR S34° E 65 LINKS (42.90')
-MONUMENT NOTED AS FOUND AND HELD IN SURVEY REFERENCE NO. 1, 2, 5.
-THIS SURVEY FOUND AND HELD THE BLM MONUMENT. THE ACCESSORIES ARE AS NOTED IN 1953 BLM DEPENDENT RESURVEY.

L-13 QUARTER CORNER SECTIONS 15 & 16:

-ORIGINALLY ESTABLISHED BY VANLIEET IN 1859. VANLIEET NOTES SETTING A POST WITH THE FOLLOWING REFERENCES:
20" FIR N23° E 37 LINKS (24.42')
12" MAPLE S25W 14 LINKS (9.24')
-IN 1973 OLSON (SURVEY REFERENCE NO. 1) FOUND THE FIR BT AND SET A 3/4" IRON PIPE WITH YPC AT THE CORNER WITH THE FOLLOWING REFERENCES:
12" FIR N04° E 16.0'
14" FIR S84° E 15.7'
-IN 1978 HAGEDORN (SURVEY REFERENCE NO. 4) FOUND THE REFERENCES AND PLACE A 5/8" IRON REBAR AT THIS POSITION.
-THIS SURVEY FOUND AND HELD A LOOSELY SET 5/8" IRON REBAR WITH NO CAP. 1 SET A TYPICAL MONUMENT PER THE LEGEND OVER THE REBAR AND ADDED THE FOLLOWING NEW REFERENCES:
9" FIR SCRIBED [1/4 S16 BT] S84W 61.95'
9" FIR SCRIBED [1/4 S16 BT] N62W 61.12'

J-13 CLOSING CORNER SECTIONS 9 & 16:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A FIR POST WITH THE FOLLOWING REFERENCES:
13" FIR N63.5° E 17 LINKS (11.22')
13" FIR N31W 34 LINKS (22.44')
-IN 1973 OLSON (SURVEY REFERENCE NO. 1) FOUND THE ORIGINAL BT'S AND SET AN IRON PIPE AT THE ORIGINAL CLOSING CORNER WITH THE FOLLOWING REFERENCES:
22" FIR NORTH 22.40'
12" FIR N07° E 5.60'
16" FIR S20W 12.10'
-SUBSEQUENT TO THE 1973 SURVEY THE PACIFIC CREST TRAIL WAS RELOCATED AND DESTROYED THE IRON PIPE
-THIS SURVEY FOUND THE 1973 BT'S, CALCULATED THE ORIGINAL CLOSING CORNER AND SET A TYPICAL MONUMENT PER THE LEGEND AT THE TRUE CLOSING CORNER. THE AMENDED CORNER WAS NOT SET
-USED THE 1973 REFERENCES FOR THE MONUMENT SET AND PLACED NEW TAGS WITH NEW BEARINGS AND DISTANCES TO THE CLOSING CORNER AS FOLLOWS:
24" FIR N83° E 5.49'
24" FIR S20W 13.40'
25" FIR N05W 22.35'

E-11 QUARTER CORNER SECTIONS 4 & 9:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A FIR POST WITH THE FOLLOWING REFERENCES:
22" RED FIR S10W 9 LINKS (5.94')
16" RED FIR N13.5W 29 LINKS (19.14')
-IN 1953 BLM CONDUCTING A DEPENDENT RESURVEY OF SECTION 4 FOUND THE ORIGINAL BT'S BUT DO NOT MENTION FINDING THE ORIGINAL POST AND SET BLM MONUMENT FROM ORIGINAL BT'S AND TOOK NEW ACCESSORIES:
10" FIR N07.25W 73 LINKS (48.18')
18" FIR S77.25W 54 LINKS (35.64')
-THIS SURVEY FOUND AND HELD THE BLM MONUMENT. THE ACCESSORIES ARE AS NOTED IN 1953 BLM DEPENDENT RESURVEY AND FOUND ONE ADDITIONAL REFERENCE:
16" FIR WITH HEALED FACE S68° E 26.7' SIDE CENTER

E-13 SECTION CORNER 3, 4, 9, 10:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A MAPLE POST WITH THE FOLLOWING REFERENCES:
30" RED FIR N33.25° E 162 LINKS (106.92')
36" FIR S35.5° E 15 LINKS (9.90')
24" FIR N16.5° W 211 LINKS (139.26')
-IN 1953 BLM CONDUCTING A DEPENDENT RESURVEY OF SECTION 4 FOUND THE ORIGINAL SW BT AND SET AN IRON POST WITH THE FOLLOWING NEW REFERENCE:
40" FIR S07.25° E 55 LINKS (36.30')
-SURVEY REFERENCE NO. 1, 2, 5 FOUND AND HELD MONUMENT
-THIS SURVEY FOUND AND HELD THE BLM MONUMENT THE ACCESSORIES ARE AS NOTED IN 1953 BLM DEPENDENT RESURVEY.

E-9 SECTIONS CORNER:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901 UNDER CONTRACT NO. 571. GESNER NOTES SETTING A STONE WITH THE FOLLOWING REFERENCES:
40" FIR N88.75° E 419 LINKS
36" FIR S84.50° E 467 LINKS
24" FIR S62W 366 LINKS
26" FIR N18.50W 179 LINKS
-IN 1953 BLM CONDUCTING A DEPENDENT RESURVEY OF SECTION 4 FOUND THE ORIGINAL THE ORIGINAL STONE AND ALL OF THE ORIGINAL ACCESSORIES AND REMONUMENTED WITH A GLO IRON PIPE AND BRASS CAP AND TOOK NEW ACCESSORIES:
8" FIR N83° E 41 LINKS
6" FIR S57° E 23 LINKS
6" FIR N25.25W 30.5 LINKS
-THIS SURVEY FOUND AND HELD THE BLM MONUMENT. THE ACCESSORIES ARE AS NOTED IN 1953 BLM DEPENDENT RESURVEY.

G-9 QUARTER CORNER SECTIONS 8 & 9:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A STONE WITH THE FOLLOWING REFERENCES:
26" FIR N08.5° E 54 LINKS (35.64')
24" FIR N50W 63 LINKS (41.35')
-IN 1953 BLM CONDUCTING A DEPENDENT RESURVEY OF SECTION 4 FOUND THE ORIGINAL BT'S BUT DO NOT MENTION FINDING THE ORIGINAL STONE AND SET BLM MONUMENT FROM ORIGINAL BT'S AND TOOK NEW ACCESSORIES:
8" FIR N55.75° E 45 LINKS (29.70')
6" FIR N22.5° W 35 LINKS (23.10')
-THIS SURVEY FOUND AND HELD THE BLM MONUMENT. THE ACCESSORIES ARE AS NOTED IN 1953 BLM DEPENDENT RESURVEY.

J-13 STANDARD CORNER SECTIONS 15 & 16:

-ORIGINALLY ESTABLISHED BY VANLIEET AND NEWCOM IN 1859. VANLIEET NOTES SETTING A POST WITH THE FOLLOWING REFERENCES:
12" FIR S44W 22 LINKS (14.52')
6" FIR N15W 8 LINKS (5.28')
26" FIR S95° E 40 LINKS (26.40')
10" FIR N30° E 12 LINKS (7.92')
-IN 1901 GESNER FOUND THE REFERENCES AND RE-ESTABLISHED THE FIR POST WITH THE FOLLOWING REFERENCES:
26" FIR S05° E 40 LINKS (26.40')
12" FIR S44W 22 LINKS (14.52')
-IN 1973 OLSON (SURVEY REFERENCE NO. 1) FOUND A BOLT AND 2 BT STUDS AND SET A 3/4" IRON PIPE WITH YPC INSIDE AND REFERENCED THE FOLLOWING:
10" FIR N44W 12.25'
16" FIR S76° E 5.05'
12" FIR S48W 8.10'
-THIS SURVEY FOUND AND HELD A 3/4" IRON PIPE WITH YPC STAMPED "OLSON 9025" PER SURVEY REFERENCE NO. X. THE REFERENCES ARE AS NOTED ON SAID SURVEY.

L-12 EAST SIXTEENTH CORNER SECTION 4 & 9:

-THIS CORNER WAS NOT ORIGINALLY ESTABLISHED BY THE GLO
-THERE IS NO RECORD OF THIS MONUMENT BEING SET
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCE:
1" POST NORTH 2'
NO OTHER ACCEPTABLE REFERENCES. CORNER IS IN CENTER OF BPA RIGHT-OF-WAY

J-5 SW CORNER SECTION 8:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901. GESNER NOTES SETTING A MAPLE POST ON AN EASTERLY SLOPE WITH THE FOLLOWING REFERENCES:
28" RED FIR N21.5° E 23 LINKS (15.18')
32" RED FIR S43.25° E 31 LINKS (20.46')
8" MAPLE S23.75W 37 LINKS (24.42')
30" RED FIR N33.25W 35 LINKS (23.10')
-ON JANUARY 31, 2011 JASON SIMES AND ED BROWN FOUND THE FOLLOWING ORIGINAL BT'S:
FANIT TREE WELL N21° E 15.2 +/-
ROTTED FIR STUMP REMAINS S43.25° E 20.46' (SET 5/8" IRON REBAR WITH LONGVIEW TIMBER YPC IN CENTER OF STUMP)
20" MAPLE RESPROUT S23.75W 28.4'
FIR STUMP REMAINS WITH VISIBLE "9" SCRIBED IN OLD FACE N33.25W 23.10' (SET 5/8" IRON REBAR WITH LONGVIEW TIMBER YPC IN CENTER OF STUMP)
-SET TYPICAL MONUMENT PER LEGEND AT DISTANCE-DISTANCE INTERSECTION OF NW AND SE ORIGINAL BT'S
NEW REFERENCES:
27" FIR SCRIBED [T2N R7E S8 BT] N25° E 83.47'
30" FIR SCRIBED [T2N R7E S17 BT] S10° E10.11'
19" FIR SCRIBED [T2N R7E S18 BT] S28W 43.53'
28" FIR SCRIBED [T2N R7E S7 BT] N33W 95.77'
STEEL 1" POST NORTH AT 3'

J-9 SE CORNER SECTION 8:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901 IN ONLY TWO DIRECTIONS (N & W). GESNER NOTES SETTING A FIR POST WITH THE FOLLOWING REFERENCES:
6" FIR N25° E 15 LINKS (9.90')
8" FIR N13.5W 27 LINKS (17.82')
-A 1955 PIPELINE RIGHT-OF-WAY MAP SHOWS A TIE TO THE SECTION CORNER DOES NOT NOTE FINDING ANYTHING. I WAS UNABLE TO TELL WHAT THEY FOUND IF ANYTHING. TRIAL CALCULATION WAS MADE FROM TIES TO THE GAS LINE AND SEARCHED FOR EVIDENCE IN THE FIELD, FOUND NOTHING.
A DILIGENT SEARCH WAS MADE AND NOTHING WAS FOUND. I CALCULATED SEVERAL PROPORTIONAL POSITIONS AND ANOTHER SEARCH WAS MADE AND FOUND NOTHING.
I DECLARED THIS CORNER AS LOST AND WAS REPLACED BY TWO POINT CONTROL USING THE QUARTER CORNER BETWEEN 8 & 9 AND THE SW CORNER OF SECTION 8.
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCES:
19" FIR SCRIBED [T2N R7E S8 BT] N38° E 24.35'
19" FIR SCRIBED [T2N R7E S8 BT] S51° E 17.35'
13" FIR SCRIBED [T2N R7E S8 BT] S05W 9.86'
20" FIR SCRIBED [T2N R7E S8 BT] N33W 20.07'

J-9 SECTION CORNER 9 & 17:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901 ON THE SOUTH LINE OF SECTION 8 11.77 CHAINS WEST OF THE SE CORNER OF SECTION 8. GESNER NOTES SETTING A FIR POST WITH THE FOLLOWING REFERENCES:
6" FIR S20W 36 LINKS (23.76')
6" FIR S35° E 34 LINKS (22.44')
-THERE IS NO OTHER RECORD OF THIS CORNER BEING FOUND OR VISITED.
-A DILIGENT SEARCH WAS MADE AND NOTHING WAS FOUND. I CALCULATED SEVERAL PROPORTIONAL POSITIONS AND ANOTHER SEARCH WAS MADE AND FOUND NOTHING.
I DECLARED THIS CORNER AS LOST AND WAS REPLACED BY SINGLE PROPORTION USING SW CORNER AND SE CORNER OF SECTION 8.
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCES:
19" FIR SCRIBED [T2N R7E S9 BT] N47° E 19.68'
22" FIR SCRIBED [T2N R7E S9 BT] S58° E 28.36'
26" FIR SCRIBED [T2N R7E S17 BT] S07W 17.85'
21" FIR SCRIBED [T2N R7E S17 BT] N12W 24.57'

J-9 SECTION CORNER 9 & 16:

-ORIGINALLY ESTABLISHED BY GESNER IN 1901 ON THE SOUTH LINE OF SECTION 8, 1.92 CHAINS SOUTH OF THE NE CORNER OF SECTION 17. GESNER NOTES SETTING A MAPLE POST WITH THE FOLLOWING REFERENCES:
6" MAPLE N6+4.25° E 6 LINKS (3.96')
8" MAPLE S69° E 14 LINKS (9.24')
-THERE IS NO OTHER RECORD OF THIS CORNER BEING FOUND OR VISITED.
-A DILIGENT SEARCH WAS MADE AND NOTHING WAS FOUND. I CALCULATED SEVERAL PROPORTIONAL POSITIONS AND ANOTHER SEARCH WAS MADE AND FOUND NOTHING.
I DECLARED THIS CORNER AS LOST AND WAS REPLACED BY SINGLE PROPORTION USING NE CORNER OF SECTION 17 AND THE WEST QUARTER CORNER OF SECTION 16.
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCES:
31" FIR SCRIBED [T2N R7E S9 BT] N45° E 40.72'
19" FIR SCRIBED [T2N R7E S16 BT] S45° E 15.55'
23" FIR SCRIBED [T2N R7E S16 BT] S29W 26.52'
32" FIR SCRIBED [T2N R7E S9 BT] N65W 15.91'

J-12 EAST SIXTEENTH CORNER SECTION 4 & 9:

-THIS CORNER WAS NOT ORIGINALLY ESTABLISHED BY THE GLO
-THERE IS NO RECORD OF THIS MONUMENT BEING SET
-SET TYPICAL MONUMENT PER LEGEND WITH THE FOLLOWING NEW REFERENCE:
1" POST NORTH 2'
NO OTHER ACCEPTABLE REFERENCES. CORNER IS IN CENTER OF BPA RIGHT-OF-WAY

