


LAND CORNER RECORD


GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: MINISTER-GLAESER SURVEYING, INC.

ADDRESS: 2200 EAST EVERGREEN BLVD.
VANCOUVER, WA 98661
360-694-3313



MINISTER-GLAESER
SURVEYING INC.

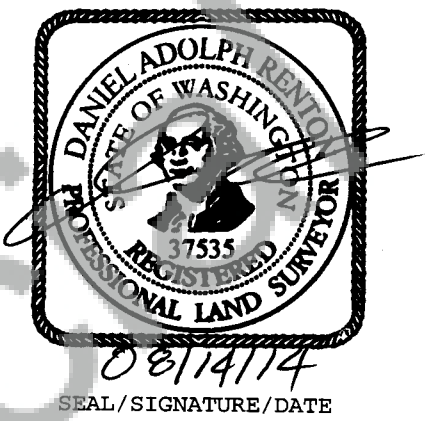

GRANTEE: PUBLIC

SEAL/SIGNATURE/DATE

LEGAL: Center South Sixteenth Corner, Section 23, TWP: 3 NORTH, RGE: 8 EAST,
CORNER CODE: Q-19
ADDITIONAL IDENTIFIER :(BLM designation, street or plat names, block, lot, etc.)

Center South Sixteenth Corner for Section 23.

COUNTY: SKAMANIA

WASHINGTON STATE PLANE COORDINATES: N: 147146.584 E: 1317831.216 THE COMBINED SCALE
FACTOR FOR THE CORNER IS 1.0000001939. THE CONVERGENCE ANGLE FOR THE CORNER
IS -0°55'03.267"

ORDER: 3rd Zone: South DATUM: NAD 83(2011) (EPOCH: 2010.0000)

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and, if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

- 1. Pertinent Corner History:
None
- 2. Evidence Found at the Corner:
On April 6th, 2014, found a 1/2" Iron Rebar Rod (no record), 1.65 feet West of computed position.
- 3. Corner Perpetuation Information

Corner monument:
A 3-1/4" Doomed Aluminum Disk set on a 5/8"x36" Iron Rebar Rod. The Doomed Aluminum Disk was stamped as follows: "T3N, R8E, CS 1/16, S23|S23, PLS 37535, 2014". A 6-foot tall orange Carsonite Witness Post was set 1-foot Northwest of said monument.

New accessories:
Each bearing tree was measured (distance and direction) to the center and referenced by a 12" spike in a small blaze on the right side base of the tree. Each bearing tree also had a United States Forest Service 54-3 (bearing tree sign) and 54-9 (land survey monument sign) attached. All bearing trees have a 4" blue band of paint, 4" red band of paint and 4" blue band of paint along with the blaze painted red with a blue outline. Two new bearing trees were blazed, scribed to replace and marked as follows:

- A FIR 29 INCHES IN DIAMETER BEARS N37°W (MAGNETIC), 18 FEET DISTANCE, MARKED CS 1/16 S23, T3N, R8E BT
- A FIR 22 INCHES IN DIAMETER BEARS S65°W (MAGNETIC), 31 FEET DISTANCE, MARKED CS 1/16 S23, T3N, R8E BT

This form is in compliance with the intent of RCW 65.04.045 and prescribed by the Public Land Survey Office, Department of Natural Resources - 1/97.

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | |
| A | | | | | | | | | | | | | | | | | | | | | | | | | | A |
| B | | | | | | | | | | | | | | | | | | | | | | | | | | B |
| C | | | 6 | | | | 5 | | | | 4 | | | | 3 | | | | 2 | | | | 1 | | | C |
| D | | | | | | | | | | | | | | | | | | | | | | | | | | D |
| E | | | | | | | | | | | | | | | | | | | | | | | | | | E |
| F | | | | | | | | | | | | | | | | | | | | | | | | | | F |
| G | | | 7 | | | | 8 | | | | 9 | | | | 10 | | | | 11 | | | | 12 | | | G |
| H | | | | | | | | | | | | | | | | | | | | | | | | | | H |
| J | | | | | | | | | | | | | | | | | | | | | | | | | | J |
| K | | | | | | | | | | | | | | | | | | | | | | | | | | K |
| L | | | | | | | | | | | | | | | | | | | | | | | | | | L |
| M | | | | | | | | | | | | | | | | | | | | | | | | | | M |
| N | | | | | | | | | | | | | | | | | | | | | | | | | | N |
| O | | | | | | | | | | | | | | | | | | | | | | | | | | O |
| P | | | | | | | | | | | | | | | | | | | | | | | | | | P |
| Q | | | | | | | | | | | | | | | | | | | | | | | | | | Q |
| R | | | | | | | | | | | | | | | | | | | | | | | | | | R |
| S | | | | | | | | | | | | | | | | | | | | | | | | | | S |
| T | | | | | | | | | | | | | | | | | | | | | | | | | | T |
| U | | | | | | | | | | | | | | | | | | | | | | | | | | U |
| V | | | | | | | | | | | | | | | | | | | | | | | | | | V |
| W | | | | | | | | | | | | | | | | | | | | | | | | | | W |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | X |
| Y | | | | | | | | | | | | | | | | | | | | | | | | | | Y |
| Z | | | | | | | | | | | | | | | | | | | | | | | | | | Z |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | |

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

