


LAND CORNER RECORD

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES
ADDRESS: 601 BOND ROAD
CASTLE ROCK, WA. 98611
(360) 740-6818

JOHN SHACKELFORD, PLS 22349
DIVISION LAND SURVEY

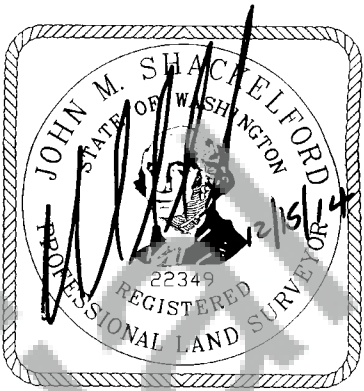

GRANTEE: PUBLIC SEAL/SIGNATURE/DATE

LEGAL: TWP: 2 NORTH RGE: 5 EAST CORNER CODE: T-21
ADDITIONAL IDENTIFIER: (BLM designation, street or plat names, block, lot, etc.)
1/4 SECTION CORNER COMMON TO SECTIONS 25 AND 26, TOWNSHIP 2 NORTH,
RANGE 5 EAST, WILLAMETTE MERIDIAN.

COUNTY: SKAMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: WAS DATUM (Date of adjustment):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and, if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

HISTORY:

- 1860 - G.L.O. SURVEYORS, VAN VLEET AND NEWSOM, UNDER CONTRACT NO. 47, SET A POST.
- 1986 - TERRY N. TRANTOW, PLS #15673, NOTES FINDING THE ORIGINAL CORNER, AS PER SHORT PLAT FILED IN BOOK 3 OF SHORT PLATS AT PAGE 90, SKAMANIA COUNTY RECORDS.
- 1995 - DAVID L. SIMES, PLS #31454, NOTES FINDING AN IRON PIPE, AS PER RECORD OF SURVEY, FILED IN BOOK 3 OF SURVEYS AT PAGE 202, SKAMANIA COUNTY RECORDS.
- 1998 - CHARLES E. WHITTEN, PLS #12412, NOTES A FOUND IRON PIPE, AS PER PLAT FILED IN BOOK B OF PLATS AT PAGES 96-97, SKAMANIA COUNTY RECORDS.
- 1999 - CHARLES E. WHITTEN, PLS #12412, NOTES THE POSITION OF AN IRON PIPE, AS PER SHORT PLAT FILED IN BOOK 3 OF SHORT PLATS AT PAGE 354, SKAMANIA COUNTY RECORDS.
- 2011 - JASON L. SIMES, PLS #44648, FOUND AND HELD AN IRON PIPE, AS PER RECORD OF SURVEY, FILED IN UNDER AUDITOR'S FILE #2011178318, SKAMANIA COUNTY RECORDS.

EVIDENCE:

06/20/13 - HELD IRON PIPE AS FOUND AND NOTED BY PREVIOUS SURVEYORS.
FIELD BOOK 3063, PAGE 65.

PERPETUATION:

06/20/13 - REPLACED FOUND IRON PIPE WITH A 1/2" REBAR AND PROPERLY IDENTIFIED,
3 1/4", D.N.R., ALUMINUM CAP


FOUND REFERENCES AS NOTED IN THE 2011,
JASON L. SIMES SURVEY, FILED UNDER
AUDITOR'S FILE #2011178318.

NEW REFERNECES WERE NOT NOTED.

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

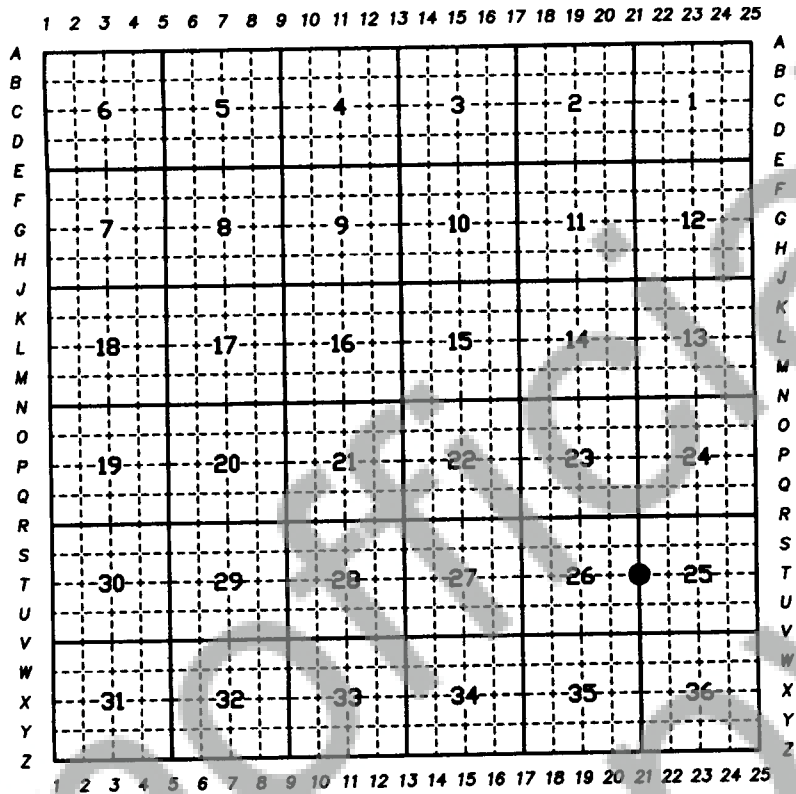

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: