

RES 20-1808(9-77)

93968

STATE OF WASHINGTON  
DEPARTMENT OF NATURAL RESOURCES  
BUREAU OF SURVEYS AND MAPS

LAND CORNER RECORD

Skamania

County

T. 3 N. R. 6 East W.M.

Corner Code No. E - 15 W.C.

Segregated Surveys:

Name: N/A

Corner No. N/A

DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:  
Originally set by 1903 G. L. O. survey.

No restoration found.

2. Description of Evidence Found:

1-20" Fir B.T. snag at S. 39 W., 32 feet from corner location.

1-24" Fir B.T. snag at N. 20 W., 22 feet from corner location.

1-15" Fir stump cut off 2-1/2 feet high at corner location as per G. L. O. notes.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 600.20 Page No. 31 Date of work 22 Sept. '80.

Witness corner to 1/4 corner is PK nail in top of 15" Fir stump cut off 2-1/2 feet high on top of rock bluff. Tree was 20" +/- diameter when alive. Set 2 D.N.R. brass caps in rock face for R.M.'s to Witness Corner.

Coordinate for R.M. No 1, Y = 162,087.88

X = 1,603,438.07

See sketch on back.

Coordinate for R.M. No. 2, Y = 162,079.50

X = 1,603,436.94

Washington Plane Coordinates: South Zone Y 162,080.93 X 1,603,437.17

3rd Order Accuracy. Derived From: USC & GS "Mowich" and USC & GS

"Lookout Mtn. RM #1"

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 11/1/82

Signature

Certificate No.

93968

AUDITOR'S CERTIFICATE

Filed for record this 17 day of 1982 at M. In Book 36 of 11/1/82 at page 18 at the request of Washington State Department of Natural Resources.

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

9.22.80

GLO 1903

S89-59W ON TRAIL CINE

38.50 CREEK BLKS WIDE N.E

39.87 1/4 COR. FALLS ON ROCK BANK, NOT SET

40.17 20" FIR. WITNESS COR.

SCRIBED W.C. 1453 1/4 S10

20" FIR S39W 194WS (W.C. 1453 1/4 S10)

29" FIR N20W 33WS (W.C. 1453 1/4 S10)


Witness Corner to the  
N 1/4 CORNER S10 T3N R6E

FOUND

15" FIR STUB ATOP ROCK BANK

20" FIR S39W 32' (BT)

24" FIR S39W 22' (BT)

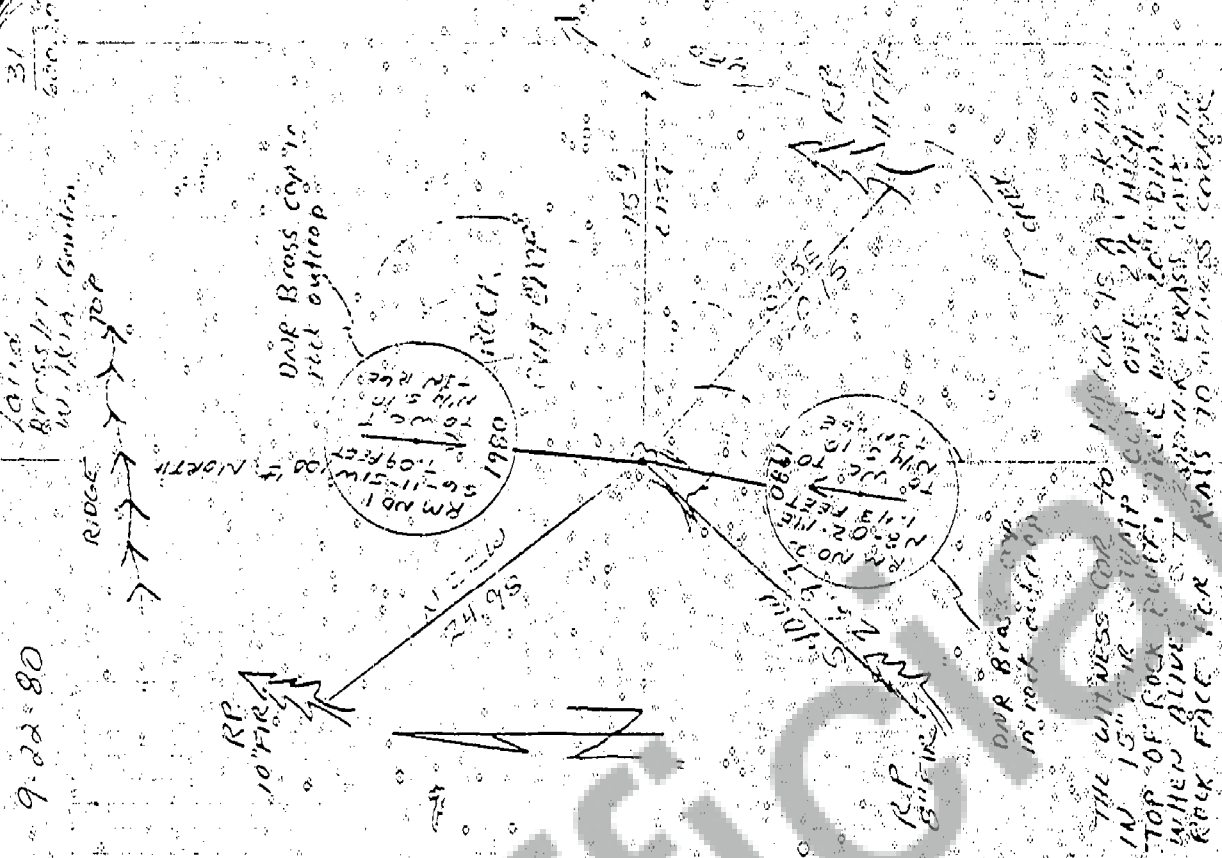

THE WITNESS COR. TO 1/4 COR. IS A P.K. MARK  
IN 15" FIR STUB ATOP ROCK BANK. THE  
TOP OF ROCK BANK, WHEN BLIVE SET, IS  
ROCK FACE FOR WITNESS CORNER