

LAND CORNER RECORD

T. 7 N, R. 5E, W.M. SKAMANIA County
 Segregated Surveys: Corner Code No. Q/R 8
 Name: C-S SE 1/64 Section 20 Corner No.: C-S SE 1/64 S20
 DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.


1. History of Corner Establishment and Subsequent Restoration:

NONE

2. Description of Evidence Found:

NONE

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 259-C Page No. 18 Date of work 8-8-84

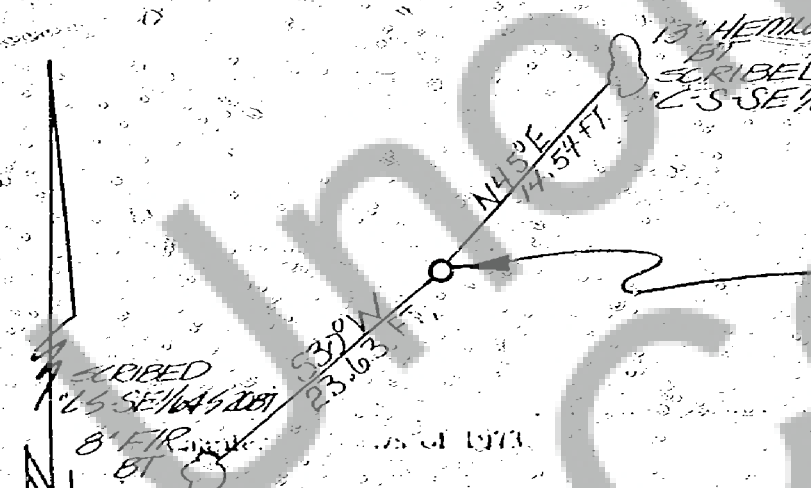

Set a 2 1/2" x 30" Aluminum Pipe, 26" in the ground with an aluminum cap. No stones available within 250' for stone mound. Cleared a 12' circle around monument.

Painted a 6" orange band around all BT's and painted faces.

Attached USFS 54-3 and 54-9 signs on all BT's

Nailed brass survey washers LS 20898 in the top circle of newly scribed "B"'s and also point of measurement on side of trees.

Set a 6' fibreglass guard post West 4.20' on line with 54-9 sign.
 Washington Plane Coordinates: Zone, Y
 Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date August 10, 1984

Signature

20898

Certificate No.

AUDITOR'S CERTIFICATE

Filed for record this 23rd day of AUGUST 1984 at 11:45 A.M. In Book 715 of MONUMENTS at page 70 at the request of

Registered S

Book 715

Page 70

Filed

Map 11

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

