
3

BOOK 3 PAGE 32

Terms Surveying
Hiar 30 55 PH '90
D. Lawry

FOUND 3/4" GAL VANIZED PIPE OF RECORD. USED PIPE SINCE DEEDS AFFECTING THE SURVEYED PROPERTY AP-PEARED TO HAVE BEEN WRITTEN WITH THIS PIPE IN MIND. DID NOT ACCEPT LS 15673 ALLIMINUM CAP AS IT APPEARED TO BE BASED ON A FENCE CORNER 1/4 MILE NORTH AND NO BETTER HISTORICAL PROOF OF OR-IGIN THAN THE FOUND PIPE.

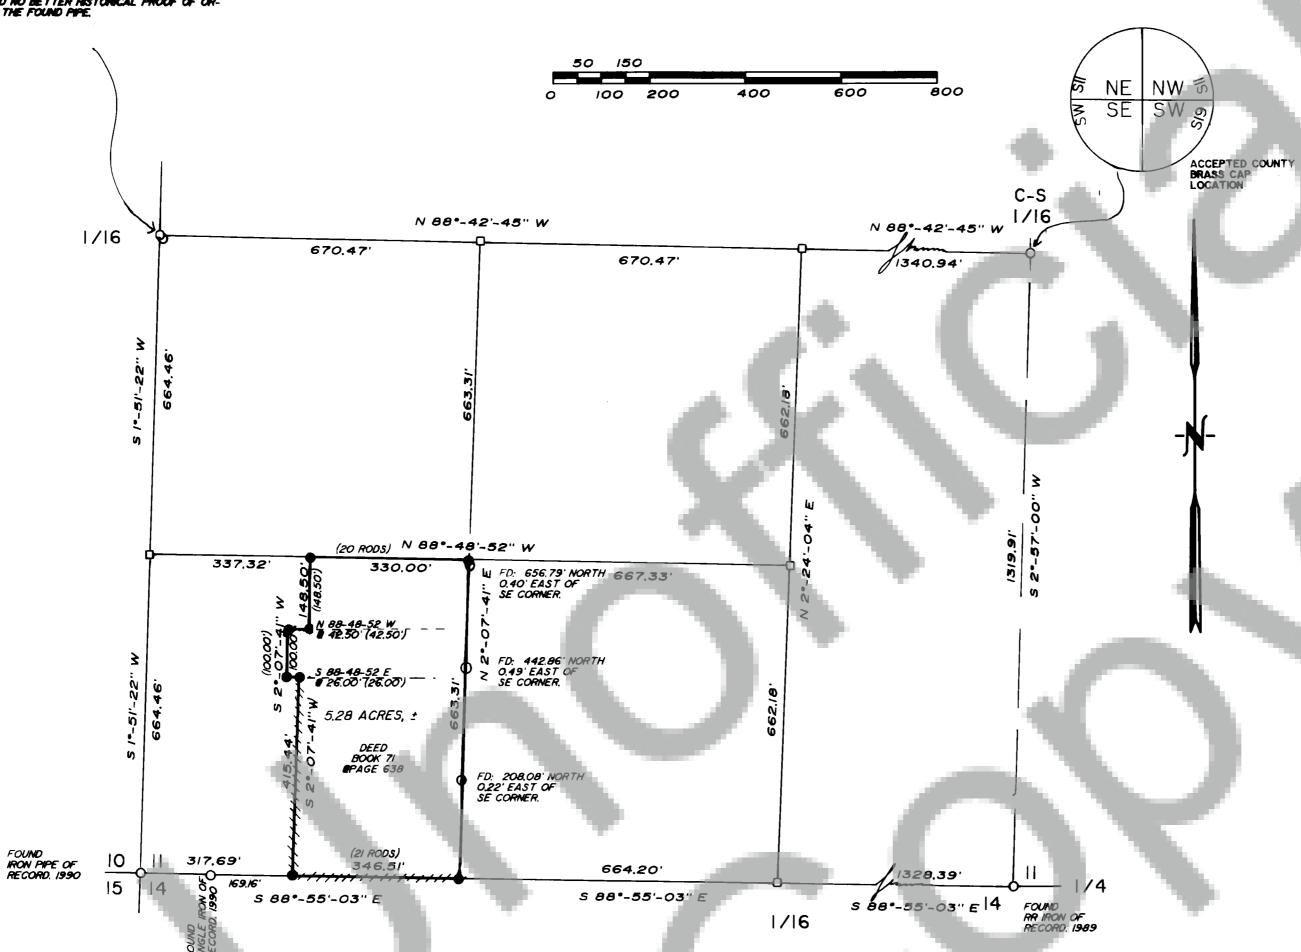

FILED FOR RECORD THIS 30 DAY OF MUY
1990 AT 156 PM IN BOOK OF SURVEYS
AT PAGE AT THE REQUEST
OF TERMS
(SIGNED) I CARUNA LANGE

SURVEYOR'S CERTIFICATE: THIS MAP CORRECTLY
REPRESENTS A SURVEY MADE BY ME OR UNDER MY
DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF
THE SURVEY RECORDING ACT AT THE REQUEST OF
SHARI JOHNSON (N MAY, 1990.

ROY/O. GAYLORD PLS 18731

SURVEY for SHARI JOHNSON

COOK, WASHINGTON

NARRATIVE:

ATTEMPTED TO USE BOOK I, AT PAGE 24Q, SURVEY FOR THE BASIS OF THIS SURVEY. FOUND THE CORNERS OF THE I/4, I/4 SECTION SATISFACTORY SINCE ALL DEVELOPMENT APPEARED TO HAVE BEEN BASED ON THESE KNOWN CORNERS OF RECORD. HOWEVER, APPEARED TO FIND A BLUNDER IN THE EAST LINE OF MY CLIENTS LINE SO SET MY OWN MONUMENTS AND SHOWED THE LOCATION OF THE FOUND MONUMENTS OF RECORD.

BASIS OF BEARING:

BOOK 2 OF SURVEYS AT PAGE 121

REFERENCES:

TERRA SURVEYING PROJECTS #8942 & 8537 PLS 15673, SKAMANIA COUNTY RECORDS, BOOK I, PAGE 240.

LEGAL DESCRIPTION:

THAT PORTION OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SECTION II, TOWNSHIP 3 NORTH, RANGE 9 EAST OF THE WILLAMETTE MERIDIAN, DESCRIBED AS FOLLOWS;

NORTH, RANGE 9 EAST OF THE WILLAMETTE MERIDIAN, DESCRIBED AS FOLLOWS;

BEGINNING AT THE NORTHEAST CORNER OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SAID SECTION II; THENCE WEST 20 RODS; THENCE SOUTH 9 RODS; THENCE WEST 42.5 FEET; THENCE SOUTH 100 FEET; THENCE EAST 26 FEET; THENCE SOUTH 411.5 FEET, MORE OR LESS, TO THE SOUTH LINE OF SAID SECTION II; THENCE EAST 21 RODS; THENCE NORTH 40 RODS, MORE OR LESS, TO THE POINT OF BEGINNING.

AS PER SKAMANIA COUNTY DEED RECORDS, BOOK 102, PAGE 544.

EQUIPMENT: TOPCON "GUPPY" GTS IOD WITH 5 SECOND HORIZONTAL ACCURACY. LAST INSPECTED: FEBRUARY, 1990 BY JOHNSON INSTRUMENT CO. CLOSURE: TRAVERSES HAD 3" SECOND ANGULAR ADJUSTMENT AND MAXIMUM OF 1:10,000 ERROR OF CLOSURE.

LEGEND:

• SET 5/8" X 30" IRON ROD W/CAP

O FOUND MONUMENT OF RECORD

CALCULATED, NOT FOUND OR SET

() DEED OR PLAT CALL

** POSTED PROPERTY LINE W / LATH

TERRA SURVEYING

DATE: MAY, 1990 SCALE: 1" = 200' PROJECT: #8931

P.O. BOX 617 HOOD RIVER, OR. 97031 PHONE (503) 386-4531