

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

FILED FOR RECORD
SKAMANIA CO. WASH
BY Roy Gaylord

JUL 9 1 35 PM '93

G. Olsson
AUDITOR
GARY M. OLSON

CORNER INDEXING INFORMATION:

TWP 2N RGE 6E CORNER CODE G-9'
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLH designation for the corner, street intersection, plat name, block, lot, etc.)

116710

BOOK 136 PAGE 616

COUNTY: SKAMANIA AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: TERRA SURVEYING

ADDRESS: P.O. Box 617
HOOD RIVER, OR.
97031



June 3, 1993

Roy Gaylord

SEAL/SIGNATURE/DATE

WASHINGTON PLANE COORDINATES: N:

E:

ORDER:

ZONE:

DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

DNR HISTORY
D.N.R. ALUMINUM CAP EXPOSED 4"
IN B.P.A. RIGHT-OF-WAY
4 REFERENCE POINTS
16" FIR AT S 77° E @ 34.81'
14" HEMLOCK AT S. 28° E. @ 39.70'
8" HEMLOCK AT S. 17° W. @ 25.04'
"X" ON EASTERLY TOWER LEG 5.7'
ABOVE GROUND AT S. 80° W @ 162.00'

TERRA

FOUND 1" DNR ALUMINUM
MENTAL MARKS IN GOOD STATE

No additional references were
required or set.

Field Book 1, Pages 14 & 15
Reference TERRA Survey # 9135 of
MAR, 1993, for Longview Fibre Company

Registered 2
Indexed, Dir. 2
Indirect 2
Filed 2
Mailed 2

DATE OF FORM: 2/92

9135

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:


(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, MES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

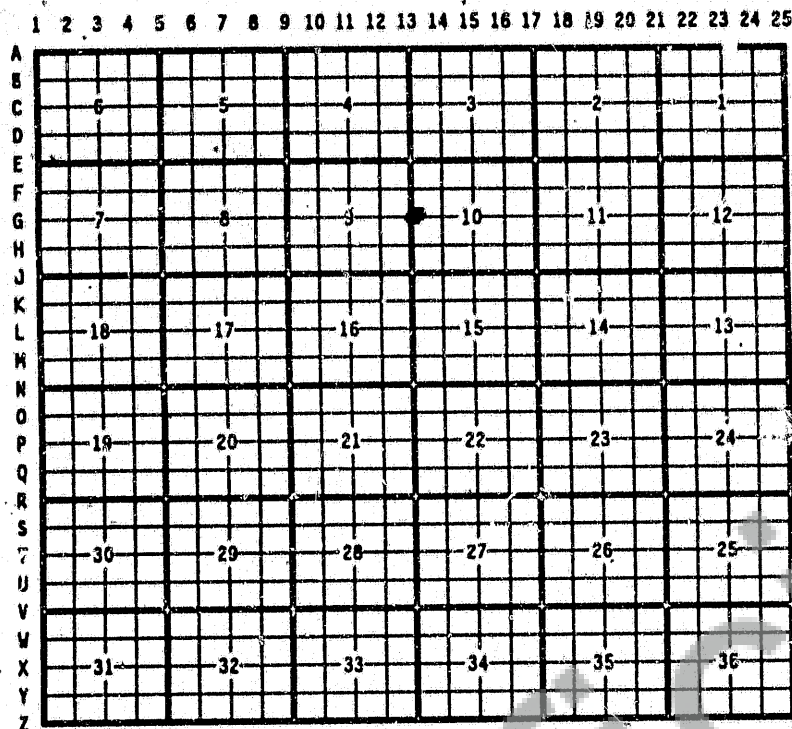

BOOK 136 PAGE 617

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: