

124689

BOOK 155 PAGE 781

LAND CORNER RECORD

(THIS FORM PREPARED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 83.06. UPL/IA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:TWP 7 NORTH RGE 6 EAST CORNER CODE L-5
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g. BLM designation for the corner, street intersection, plat name, block, lot, etc.)

FILED FOR RECORD
SKAMANIA CO. WASH
BY *Olson Engineering*


FEB 28 1 11 PM '96

Olson
AUDITOR
GARY M. OLSONEast Quarter SECTION 18 COUNTY: SKAMANIA
LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY (OR AGENCY): **OLSON ENGINEERING, INC.**
1111 BROADWAY
ADDRESS: VANCOUVER, WA 98660

AUDITOR'S USE



WASHINGTON PLANE COORDINATES:


N:

E: 2/13/96

ORDER:

ZONE:

DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner:
(1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner perpetuation information. Please title and number the parties of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work). (See the back of this form for the requirements of the Survey Recording Act).

The original East quarter corner was established in 1900 by Lewis D.W. Shelton, under contract #552 as a White Fir post marked "1/4 S 18" on the West face and "1/4 S 17" on the East face with the accessories of a scribed 10" White Fir North 75° East 24 links, and a scribed 7" White Fir North 40° West 25 links.

In 1969 the Department of Natural Resources found both bearing trees down and set a concrete monument with brass cap with new accessories of a 10" White Fir North 46° West, 26.9 feet and a 6" Aspen South 68° East 14.6 feet.

Olson Engineering found the Department of Natural Resources monument in 1976 and in 1995.

Registered	✓
Indexed, etc.	✓
Indirect	✓
Filed	
Altered	

OLSON LAND SURVEYORS
ENGINEERS
ENGINEERING INC. 1111 BROADWAY, VANCOUVER, WA 98660
(206) 607-1385

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:


(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "S" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated NW-4-5.

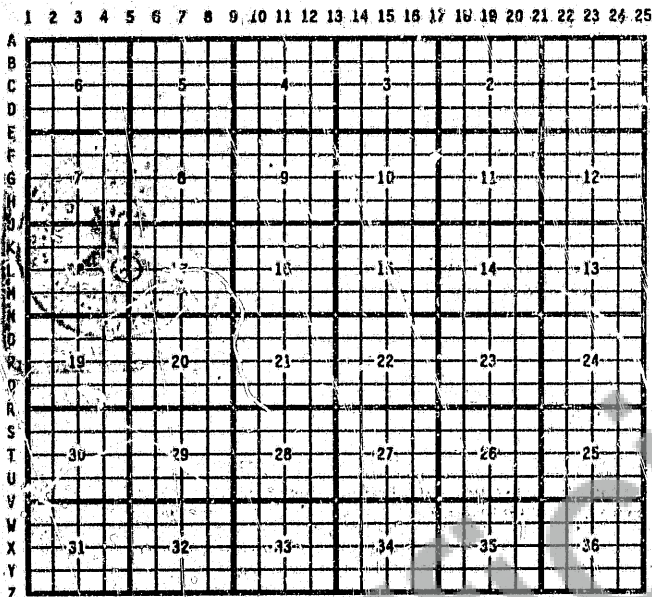

RCH 58.09.06R (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: