

124690

BOOK 155 PAGE 783

**LAND CORNER RECORD**

(THIS FORM PREPARED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 59.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK)

FILED FOR RECORD  
SKAMANIA CO. WASH  
BY *Olson Engineering***CORNER INDEXING INFORMATION:**TWP 7 North RGE 5 East CORNER CODE L-1  
(Willamette Meridian) (See instructions on back of LCR)

FEB 28 1 13 PM '96

*Olson*  
AUDITOR  
GARY M. OLSON


ADDITIONAL IDENTIFIER: (e.g. BLM designation for the corner, street intersection, plat name, block, lot, etc.)

EAST QUARTER CORNER SEC. 13 COUNTY: SKAMANIA

AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 59.09.090)

This corner record correctly represents work performed by me or under my direction in conformity with the Survey Recording Act.

COMPANY OR AGENCY: **OLSON ENGINEERING, INC.**  
1111 BROADWAY  
ADDRESS: **VANCOUVER, WA 98660**

WASHINGTON PLANE COORDINATES:


N:

E:

ORDER:

ZONE:

DATE UM (Date of adjustment):

**CORNER INFORMATION:** Use the space below to provide the following information regarding the corner:  
(1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner perpetuation information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work). (See the back of this form for the requirements of the Survey Recording Act).

The original East quarter corner was established in 1900 by Lewis D.W. Shelton under contract No. 552 as a Hemlock post marked "1/4 S 13" on the West face and "1/4 S 18" on the East face with the accessories of a scribed 50" Cedar North 77° East, 29 links and a 10" White Fir South 49.5° West, 26 links.

In 1969 the Department of Natural Resources found the original bearing trees and set a concrete monument with accessories of the original bearing trees.

Registered ☒Indexed, Lit ☒Indirect ☒Filmed ☒Mailed ☒**OLSON** LAND SURVEYORS  
ENGINEERS  
ENGINEERING INC. 1111 BROADWAY, VANCOUVER, WA 98660  
(206) 695-1385

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.

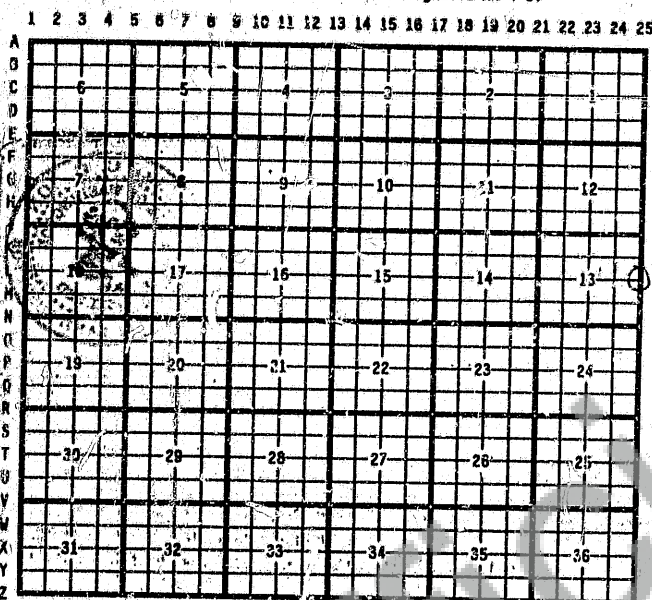
(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.



RCW 58.09.050 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: